



# SGM4573

## Open-Drain, Dual-Supply Translating Transceiver with Auto Direction Sensing

### GENERAL DESCRIPTION

The SGM4573 is a 4-bit, dual-supply translating transceiver. The auto direction sensing function allows a bidirectional voltage level translation for the device. The An and Bn are 4-bit input-output ports and OE is an output enable input.  $V_{CCA}$  and  $V_{CCB}$  are two supply pins that accept the voltage from 1.65V to 3.6V and 2.3V to 5.5V respectively. This makes the translation among voltage nodes of 1.8V, 2.5V, 3.3V and 5V available. OE and An pins track the  $V_{CCA}$  supply and Bn pins track the  $V_{CCB}$  supply. When OE pin is held low, the outputs enter a high-impedance state.

### FEATURES

- $V_{CCA}$  Supply Voltage Range: 1.65V to 3.6V
- $V_{CCB}$  Supply Voltage Range: 2.3V to 5.5V
- Inputs Accept Voltages up to 5.5V
- Max Data Rates:
  - ♦ Push-Pull: 24Mbps
  - ♦ Open-Drain: 2Mbps
- Support Partial Power-Down Mode
- -40°C to +125°C Operating Temperature Range
- Available in Green TSSOP-14 and TQFN-3.5×3.5-14AL Packages

### APPLICATIONS

Computers  
Mobile Phones

### FUNCTION TABLE

SUPPLY VOLTAGE		CONTROL INPUT	INPUT/OUTPUT	
$V_{CCA}^{(1)}$	$V_{CCB}$	OE	An	Bn
1.65V to 3.6V	2.3V to 5.5V	L	Z	Z
1.65V to 3.6V	2.3V to 5.5V	H	Input or Output	Output or Input
GND <sup>(2)</sup>	GND <sup>(2)</sup>	X	Z	Z

H = High Voltage Level

L = Low Voltage Level

Z = High-Impedance State

X = Don't Care

NOTES:

1.  $V_{CCA} \leq V_{CCB}$  and  $V_{CCA} \leq 3.6V$ .

2. The device enters power-down mode when either  $V_{CCA}$  or  $V_{CCB}$  is at GND.


## PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM4573	TSSOP-14	-40°C to +125°C	SGM4573XTS14G/TR	4573 XTS14 XXXXX	Tape and Reel, 4000
	TQFN-3.5×3.5-14AL	-40°C to +125°C	SGM4573XTSZ14G/TR	SGM4573 XTSZ14 XXXXX	Tape and Reel, 4000

## MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

Supply Voltage Range, $V_{CCA}$ .....	-0.5V to 6.5V
Supply Voltage Range, $V_{CCB}$ .....	-0.5V to 6.5V
Input Voltage Range, $V_I$ <sup>(2)</sup> .....	-0.5V to 6.5V
Output Voltage Range, $V_O$ <sup>(2)</sup> .....	
Active Mode, A or B Ports .....	-0.5V to $V_{CCO} + 0.5V$
Power-Down Mode or 3-State Mode	
A Ports .....	-0.5V to 4.6V
B Ports .....	-0.5V to 6.5V
Input Clamp Current, $I_{IK}$ ( $V_I < 0V$ ) .....	-50mA
Output Clamp Current, $I_{OK}$ ( $V_O < 0V$ ) .....	-50mA
Output Current, $I_O$	
High-State .....	-50mA
Low-State .....	50mA
Supply Current, $I_{CCA}$ or $I_{CCB}$ .....	100mA
Ground Current, $I_{GND}$ .....	-100mA
Junction Temperature <sup>(3)</sup> .....	+150°C
Storage Temperature Range .....	-65°C to +150°C
Lead Temperature (Soldering, 10s) .....	+260°C
ESD Susceptibility	
HBM.....	6000V
CDM .....	1000V

## RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range, $V_{CCA}$ .....	1.65V to 3.6V
Supply Voltage Range, $V_{CCB}$ .....	2.3V to 5.5V
Input Transition Rise or Fall Rate, $\Delta t/\Delta V$	
A or B Ports, Push-Pull Driving	
$V_{CCA} = 1.65V$ to 3.6V, $V_{CCB} = 2.3V$ to 5.5V.....	10ns/V (MAX)
OE Input	
$V_{CCA} = 1.65V$ to 3.6V, $V_{CCB} = 2.3V$ to 5.5V.....	10ns/V (MAX)
Operating Temperature Range .....	-40°C to +125°C

## OVERSTRESS CAUTION

1. Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.
2. The minimum input voltage ratings and output voltage ratings may be exceeded if the input and output current ratings are observed.
3. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.



## ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

## DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

## PIN CONFIGURATIONS

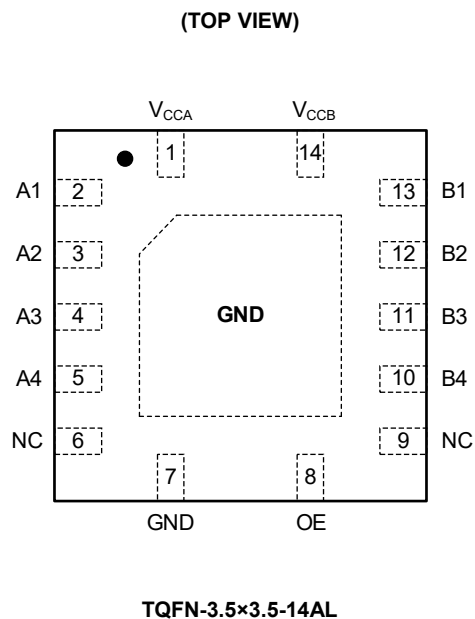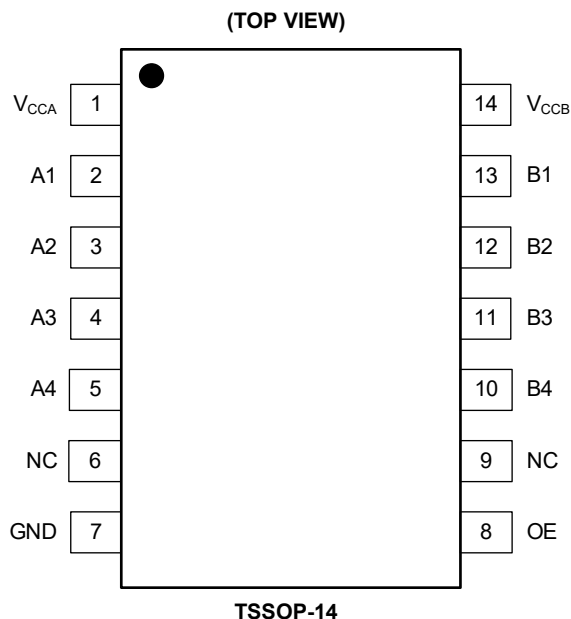

## PIN DESCRIPTION

PIN	NAME	FUNCTION
1	$V_{CCA}$	Supply Voltage on A Ports.
2, 3, 4, 5	A1, A2, A3, A4	Data Inputs/Outputs. They track the $V_{CCA}$ supply.
6, 9	NC	No Connection.
7	GND	Ground.
8	OE	Output Enable Input. It tracks the $V_{CCA}$ supply. (Active-High)
10, 11, 12, 13	B4, B3, B2, B1	Data Inputs/Outputs. They track the $V_{CCB}$ supply.
14	$V_{CCB}$	Supply Voltage on B Ports.
Exposed Pad	GND	Connect it to GND internally. This pad is not an electrical connection point. TQFN-3.5x3.5-14AL package only.

## ELECTRICAL CHARACTERISTICS

(Full = -40°C to +125°C, all typical values are measured at T<sub>A</sub> = +25°C, unless otherwise noted.)<sup>(1)</sup>

PARAMETER	SYMBOL	CONDITIONS			TEMP	MIN	TYP	MAX	UNITS	
High-Level Input Voltage	V <sub>IH</sub>	A ports	V <sub>CCA</sub> = 1.65V to 1.95V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	V <sub>CCA</sub> - 0.2		V <sub>CCA</sub>	V	
			V <sub>CCA</sub> = 2.3V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	V <sub>CCA</sub> - 0.4		V <sub>CCA</sub>		
		B ports	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	V <sub>CCB</sub> - 0.4		V <sub>CCB</sub>		
		OE input	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	0.7 × V <sub>CCA</sub>		V <sub>CCA</sub>		
Low-Level Input Voltage	V <sub>IL</sub>	A or B ports	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	0		0.15	V	
		OE input	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	0		0.35 × V <sub>CCA</sub>		
High-Level Output Voltage	V <sub>OH</sub>	A ports	I <sub>O</sub> = -20μA, V <sub>I</sub> ≥ V <sub>CCB</sub> - 0.4V, V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	0.67 × V <sub>CCA</sub>			V	
		B ports	I <sub>O</sub> = -20μA, V <sub>I</sub> ≥ V <sub>CCA</sub> - 0.2V, V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full	0.67 × V <sub>CCB</sub>				
Low-Level Output Voltage	V <sub>OL</sub>	A or B ports	I <sub>O</sub> = 1mA, V <sub>I</sub> ≤ 0.15V, V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full			0.4	V	
Input Leakage Current	I <sub>I</sub>	OE input	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full			±2	μA	
Off-State Output Current <sup>(2)</sup>	I <sub>OZ</sub>	A or B ports	OE = 0V, V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full			±2	μA	
Power-Off Leakage Current	I <sub>OFF</sub>	A ports	V <sub>CCA</sub> = 0V, V <sub>CCB</sub> = 0V to 5.5V		Full			±2	μA	
		B ports	V <sub>CCB</sub> = 0V, V <sub>CCA</sub> = 0V to 3.6V		Full			±2		
Supply Current	I <sub>CC</sub>	OE = 0V or V <sub>CCA</sub> , A <sub>n</sub> , B <sub>n</sub> open								
		I <sub>CCA</sub>	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full			2	μA	
			V <sub>CCA</sub> = 3.6V, V <sub>CCB</sub> = 0V		Full			2		
			V <sub>CCA</sub> = 0V, V <sub>CCB</sub> = 5.5V		Full			-2		
		I <sub>CCB</sub>	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full			5		
			V <sub>CCA</sub> = 3.6V, V <sub>CCB</sub> = 0V		Full			-2		
			V <sub>CCA</sub> = 0V, V <sub>CCB</sub> = 5.5V		Full			2		
		I <sub>CCA</sub> + I <sub>CCB</sub>	V <sub>CCA</sub> = 1.65V to 3.6V, V <sub>CCB</sub> = 2.3V to 5.5V		Full			7		
Input Capacitance	C <sub>I</sub>	OE input	V <sub>CCA</sub> = 3.3V, V <sub>CCB</sub> = 3.3V		+25°C		3		pF	
Input/Output Capacitance	C <sub>I/O</sub>	A ports	V <sub>CCA</sub> = 3.3V, V <sub>CCB</sub> = 3.3V		Enabled	+25°C		8		pF
					Disabled	+25°C		5		
		B ports	V <sub>CCA</sub> = 3.3V, V <sub>CCB</sub> = 3.3V		Enabled	+25°C		8		
					Disabled	+25°C		5		

## NOTES:

- V<sub>CCA</sub> ≤ V<sub>CCB</sub> and V<sub>CCA</sub> ≤ 3.6V.
- For transceivers, the parameter I<sub>OZ</sub> includes the input leakage current.

## DYNAMIC CHARACTERISTICS

(See Figure 1 for test circuit. See Figure 2 and Figure 3 for waveforms. Full = -40°C to +125°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	UNITS
High-to-Low Propagation Delay	t <sub>PHL</sub>	Push-Pull driving, An to Bn					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			7.5	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			9.5	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			14	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			5.5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			7.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			4.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			5.5	
		Push-Pull driving, Bn to An					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			7	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			7	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			7	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			6	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			6.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			4.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			5	
Low-to-High Propagation Delay	t <sub>PLH</sub>	Push-Pull driving, An to Bn					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			13.5	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			11	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			10	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			10	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			8.5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			7	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			5.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			6	
		Push-Pull driving, Bn to An					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			11	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			10	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			10	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			6.5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			5.5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			5.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			4.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			4.5	

**DYNAMIC CHARACTERISTICS (continued)**

(See Figure 1 for test circuit. See Figure 2 and Figure 3 for waveforms. Full = -40°C to +125°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	UNITS
Enable Time <sup>(2)</sup>	$t_{EN}$	OE to An, Bn					
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 2.5V \pm 0.2V$	Full			26	ns
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 3.3V \pm 0.3V$	Full			25	
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 5.0V \pm 0.5V$	Full			24	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 2.5V \pm 0.2V$	Full			13	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 3.3V \pm 0.3V$	Full			16.5	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 5.0V \pm 0.5V$	Full			15	
		$V_{CCA} = 3.3V \pm 0.3V, V_{CCB} = 3.3V \pm 0.3V$	Full			9	
		$V_{CCA} = 3.3V \pm 0.3V, V_{CCB} = 5.0V \pm 0.5V$	Full			11.5	
Disable Time <sup>(2)</sup>	$t_{DIS}$	OE to An					
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 2.5V \pm 0.2V$	Full			260	ns
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 3.3V \pm 0.3V$	Full			260	
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 5.0V \pm 0.5V$	Full			260	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 2.5V \pm 0.2V$	Full			195	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 3.3V \pm 0.3V$	Full			195	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 5.0V \pm 0.5V$	Full			195	
		$V_{CCA} = 3.3V \pm 0.3V, V_{CCB} = 3.3V \pm 0.3V$	Full			280	
		$V_{CCA} = 3.3V \pm 0.3V, V_{CCB} = 5.0V \pm 0.5V$	Full			280	
		OE to Bn					
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 2.5V \pm 0.2V$	Full			190	ns
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 3.3V \pm 0.3V$	Full			285	
		$V_{CCA} = 1.8V \pm 0.15V, V_{CCB} = 5.0V \pm 0.5V$	Full			200	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 2.5V \pm 0.2V$	Full			185	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 3.3V \pm 0.3V$	Full			275	
		$V_{CCA} = 2.5V \pm 0.2V, V_{CCB} = 5.0V \pm 0.5V$	Full			185	
		$V_{CCA} = 3.3V \pm 0.3V, V_{CCB} = 3.3V \pm 0.3V$	Full			280	
		$V_{CCA} = 3.3V \pm 0.3V, V_{CCB} = 5.0V \pm 0.5V$	Full			185	

**DYNAMIC CHARACTERISTICS (continued)**

(See Figure 1 for test circuit. See Figure 2 and Figure 3 for waveforms. Full = -40°C to +125°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	UNITS
High-to-Low Output Transition Time	t <sub>THL</sub>	Push-Pull driving, A ports					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	1.5		10	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	2		10.5	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	1.5		11	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	1.5		8	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	1		10	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	1		8	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	1.5		7	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	1		7	
		Push-Pull driving, B ports					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	3		13.5	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	3		17.5	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	4		26	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	2		8	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	2.5		9	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	3		13.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	2.5		7	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	2		8	
Low-to-High Output Transition Time	t <sub>TLH</sub>	Push-Pull driving, A ports					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	2.5		19.5	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	2.5		19.5	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	2.5		21	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	2.5		12.5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	2		10.5	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	2		11.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	2		9.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	1.5		9.5	
		Push-Pull driving, B ports					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	2		18	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	1.5		14.5	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	1.5		11	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	1.5		16	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	1.5		13	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	1.5		11	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	1.5		11.5	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	1.5		10	

**DYNAMIC CHARACTERISTICS (continued)**

(See Figure 1 for test circuit. See Figure 2 and Figure 3 for waveforms. Full = -40°C to +125°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	UNITS
Channel-to-Channel Skew <sup>(3)</sup>	t <sub>SKO</sub>	Push-Pull driving, between channels					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			0.8	ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			0.8	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			0.8	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			0.8	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			0.8	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			0.8	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			0.8	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			0.8	
Pulse Width	t <sub>w</sub>	Push-Pull driving, data inputs					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	41			ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	41			
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	41			
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	41			
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	41			
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	41			
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	41			
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	41			
		Open-Drain driving, data inputs					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	500			ns
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	500			
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	500			
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full	500			
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	500			
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	500			
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full	500			
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full	500			



**DYNAMIC CHARACTERISTICS (continued)**


(See Figure 1 for test circuit. See Figure 2 and Figure 3 for waveforms. Full = -40°C to +125°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	UNITS
Data Rate	f <sub>DATA</sub>	Push-Pull driving					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			24	Mbps
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			24	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			24	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			24	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			24	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			24	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			24	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			24	
		Open-Drain driving					
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			2	Mbps
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			2	
		V <sub>CCA</sub> = 1.8V ± 0.15V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			2	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 2.5V ± 0.2V	Full			2	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			2	
		V <sub>CCA</sub> = 2.5V ± 0.2V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			2	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 3.3V ± 0.3V	Full			2	
		V <sub>CCA</sub> = 3.3V ± 0.3V, V <sub>CCB</sub> = 5.0V ± 0.5V	Full			2	

## NOTES:

1. Specified by design and characterization, not production tested.
2.  $t_{EN}$  is the same as  $t_{PZL}$  and  $t_{PZH}$ .  $t_{DIS}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ .
3. Skew between any two outputs of the same package switches in the same direction.

## TEST CIRCUIT

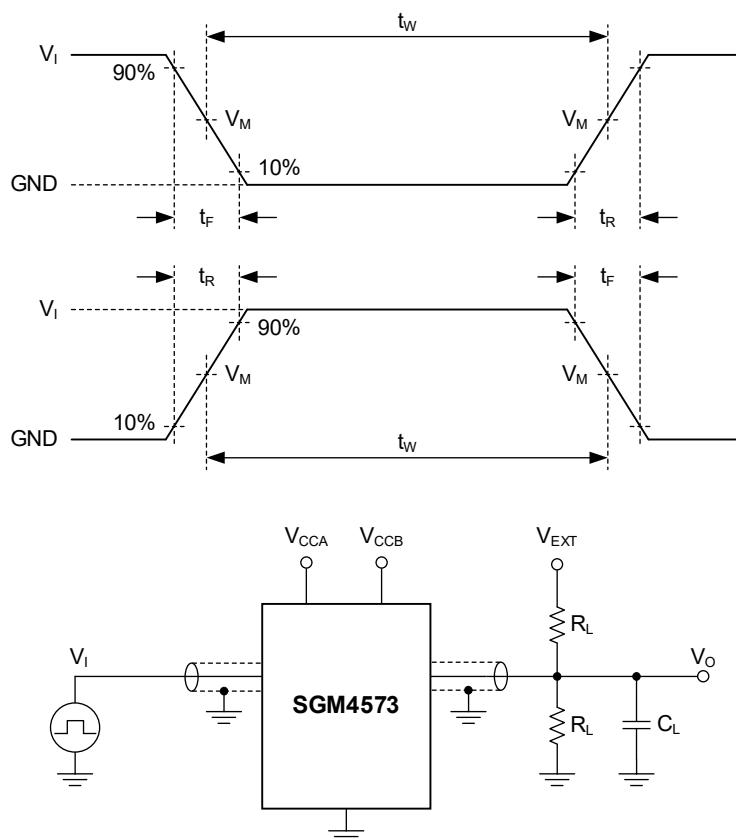

Test conditions are given in Table 1.

Definitions for test circuit:

$R_L$ : Load resistance.

$C_L$ : Load capacitance (includes jig and probe).

$V_{EXT}$ : External voltage is used to measure switching time.

Figure 1. Test Circuit for Measuring Switching Times

Table 1. Test Conditions

SUPPLY VOLTAGE		INPUT		LOAD		$V_{EXT}$		
$V_{CCA}$	$V_{CCB}$	$V_I$	$t_R, t_F$	$C_L$	$R_L^{(2)}$	$t_{PLH}, t_{PHL}$	$t_{PLZ}, t_{PZL}$	$t_{PHZ}, t_{PZH}$
1.65V to 3.6V	2.3V to 5.5V	$V_{CCI}^{(1)}$	$\leq 1\text{ns}$	15pF	50k $\Omega$ , 1M $\Omega$	Open	$2 \times V_{CCO}^{(3)}$	Open

NOTES:


1.  $V_{CCI}$  is the supply voltage associated with the data input ports.

2.  $R_L = 50\text{k}\Omega$  is used for the measurements of enable and disable times.

$R_L = 1\text{M}\Omega$  is used for the measurements of pulse width, propagation delay, data rate and output rise and fall times.

3.  $V_{CCO}$  is the supply voltage associated with the data output ports.

## WAVEFORMS

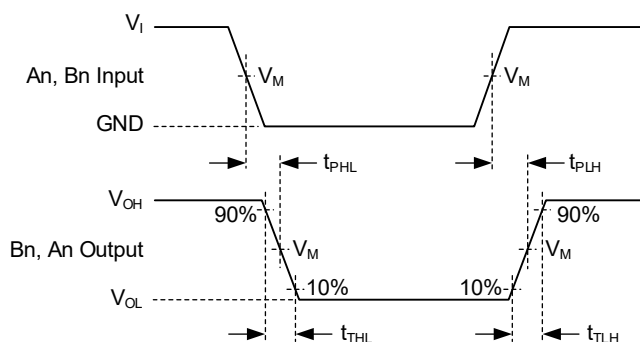


Test conditions are given in Table 1.

Measurement points are given in Table 2.

Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

**Figure 2. Input (An, Bn) to Output (Bn, An) Propagation Delays**

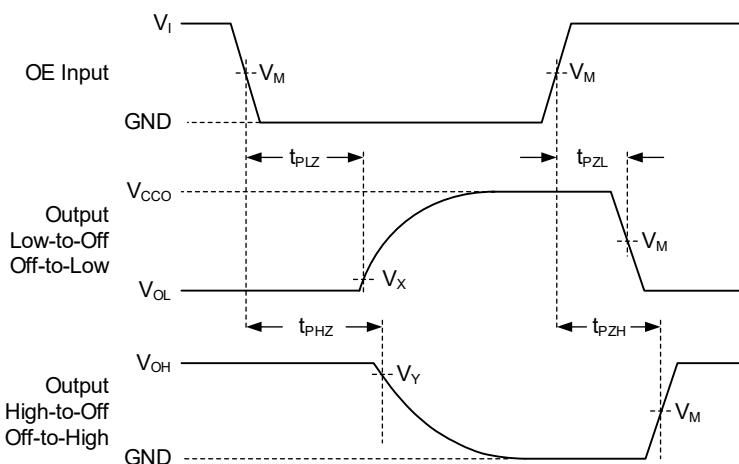

Test conditions are given in Table 1.

Measurement points are given in Table 2.

Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

**Figure 3. Enable and Disable Times**

**Table 2. Measurement Points**

SUPPLY VOLTAGE	INPUT		OUTPUT		
$V_{CCO}^{(2)}$	$V_I$	$V_M^{(3)}$	$V_M$	$V_X$	$V_Y$
$1.8V \pm 0.15V$	$V_{CCI}^{(1)}$	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
$2.5V \pm 0.2V$	$V_{CCI}$	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
$3.3V \pm 0.3V$	$V_{CCI}$	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$
$5.0V \pm 0.5V$	$V_{CCI}$	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$

## NOTES:

- $V_{CCI}$  is the supply voltage associated with the data input ports.
- $V_{CCO}$  is the supply voltage associated with the data output ports.
- The measurement points should be  $V_{IH}$  or  $V_{IL}$  when the input rising or falling time exceeds 1ns.

## APPLICATION INFORMATION

## Voltage Level-Translation Applications

SGM4573 can be used between two devices with different power supply voltages.

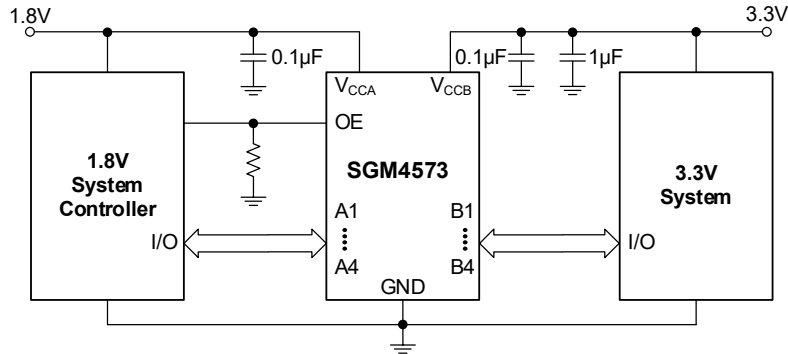


Figure 4. Recommended Application Circuit

## Internal Structure

Figure 5 illustrates the internal structure of SGM4573. There is no control mechanism for the bidirectional transmission.

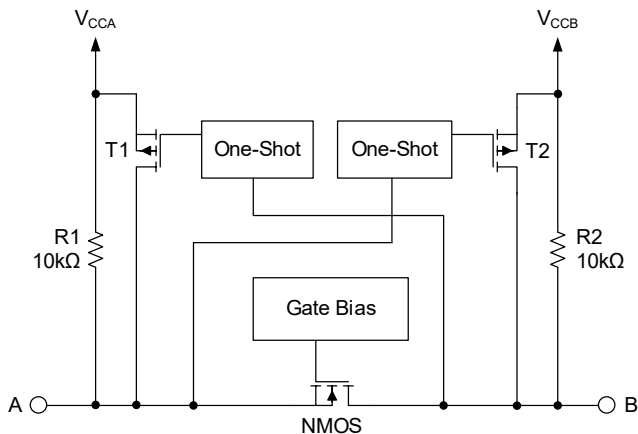


Figure 5. Internal Structure of SGM4573 (One Channel)

SGM4573 can transmit the signal transparently with two enable mechanisms:

1. An NMOS transistor is placed between the two ports to turn on or off the transmission.
2. An accelerator is located at the output of SGM4573. Its function is to accelerate the rising edge of the signal.

For the application of low-to-high transition, the one-shot mechanism is significant as it can accelerate the transition of output. If the voltage level of the input signal reaches  $V_{IH}$ , the one-shot mechanism will be triggered. After that, one-shot mechanism is disabled and the pull-up resistor will dominate. The output impedance is within the range of  $50\Omega$  and  $70\Omega$  when the device is accelerating. If the users want to transmit a signal from the other direction, please make sure to transmit the signal after the one-shot mechanism is turned off to minimize dynamic current and contention. The pull-up resistors are in the internal of SGM4573.

## Input Driver Requirements

The shape of the input signal affects the output directly, because SGM4573 is a voltage translator with switching characteristics. The amount of sinking current is determined by the structure of driver (push-pull or open-drain). In addition, the output impedance and the edge-rate of the driver will determine the properties of propagation delay, max data rate and transition time of high-to-low output. The typical value shown in this datasheet is under the condition of  $50\Omega$  output impedance.

## APPLICATION INFORMATION (continued)

### Output Load Considerations

The application of heavy capacitive load would affect the ability of one-shot mechanism, which means that the output of the device may not reach the positive supply rail within the duration of one-shot pulse. To reduce this possibility, users need to use shorter traces in PCB and less capacitive connectors. In addition, another advantage of using short traces is to provide low-impedance, avoiding oscillation of the signal, allowing reflection of the signal within one-shot duration and avoiding retriggering of one-shot function.

### Power-Up

For the application of SGM4573, the  $V_{CCA}$  should be less than  $V_{CCB}$ . However, it does not matter if the power supply voltage is ramping, and the sequence of power-up for both  $V_{CCA}$  and  $V_{CCB}$  is not defined. If one of the two power supplies is switched off, the internal circuit can disable the operation of SGM4573.

### Enable and Disable

The OE pin is used to disable the output of the device, which means that if this pin is low, all of the transmitting pins are in high-impedance mode. The disable time ( $t_{DIS}$ ) of this process is defined between the start of low position at OE pin and the start of output disables. For the definition of enable time ( $t_{EN}$ ), it refers to the time between when OE pin is high and when the one-shot circuit is launched. In addition, if the users want to keep the device in off-state (high-impedance mode) when the power supply voltage is rising or falling, please connect OE pin to ground with a suitable resistor. And the value of the selected resistor is determined by the sinking-current capability of the driver.

### Pull-Up or Pull-Down Resistors on I/O Lines

For both A and B sides, each transmission pin is pulled up to the power supply of A and B respectively. An external resistor that is parallel with the internal 10k $\Omega$  resistor can be added, which will affect the value of  $V_{OL}$ . However, the internal pull-up resistor will be disabled if OE pin is low.



## REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


<b>JANUARY – 2024 REV.A.2 to REV.A.3</b>		<b>Page</b>
Updated Features section.....		1
Updated Dynamic Characteristics section.....		8, 9
<b>NOVEMBER – 2023 REV.A.1 to REV.A.2</b>		<b>Page</b>
Updated Tape and Reel Information .....		16
Added TQFN-3.5×3.5-14AL package.....		All
<b>JUNE – 2023 REV.A to REV.A.1</b>		<b>Page</b>
Updated Dynamic Characteristics section.....		5, 7, 8
<b>Changes from Original (APRIL 2022) to REV.A</b>		<b>Page</b>
Changed from product preview to production data.....		All

## PACKAGE OUTLINE DIMENSIONS

### TSSOP-14

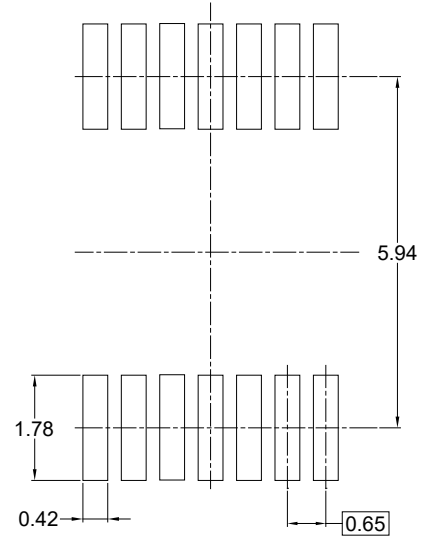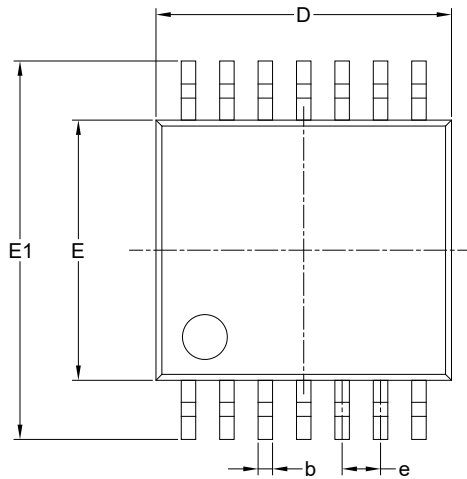

RECOMMENDED LAND PATTERN (Unit: mm)

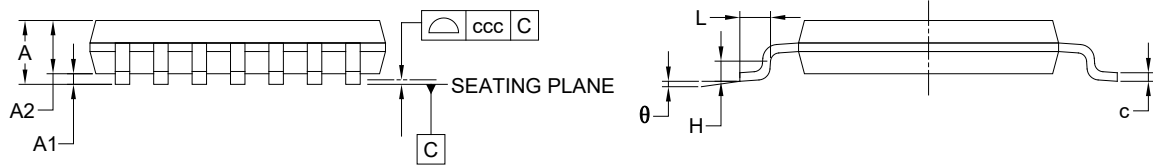


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.200
A1	0.050	-	0.150
A2	0.800	-	1.050
b	0.190	-	0.300
c	0.090	-	0.200
D	4.860	-	5.100
E	4.300	-	4.500
E1	6.200	-	6.600
e	0.650 BSC		
L	0.450	-	0.750
H	0.250 TYP		
θ	0°	-	8°
ccc	0.100		

#### NOTES:


1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-153.

## PACKAGE OUTLINE DIMENSIONS


### TQFN-3.5×3.5-14AL

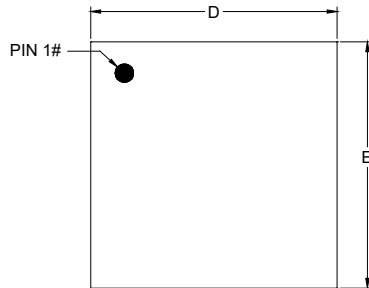



TOP VIEW

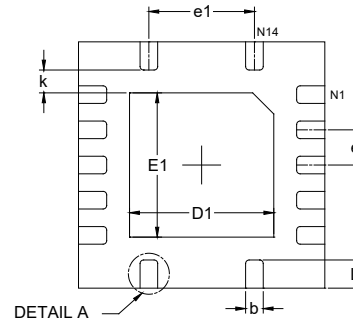

BOTTOM VIEW

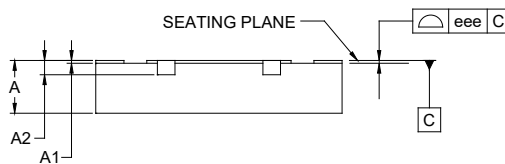

SIDE VIEW

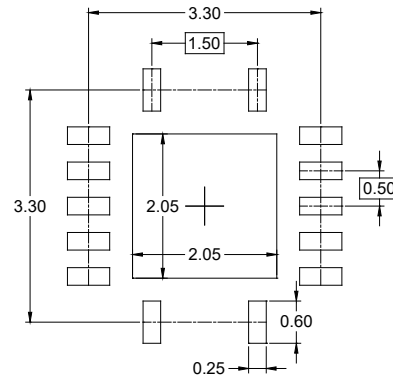

RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.700	-	0.800
A1	0.000	-	0.050
A2	0.203 REF		
b	0.200	-	0.300
D	3.400	-	3.600
E	3.400	-	3.600
D1	1.950	-	2.150
E1	1.950	-	2.150
e	0.500 BSC		
e1	1.500 BSC		
k	0.200 MIN		
L	0.300	-	0.500
eee	0.080		


NOTE: This drawing is subject to change without notice.




# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

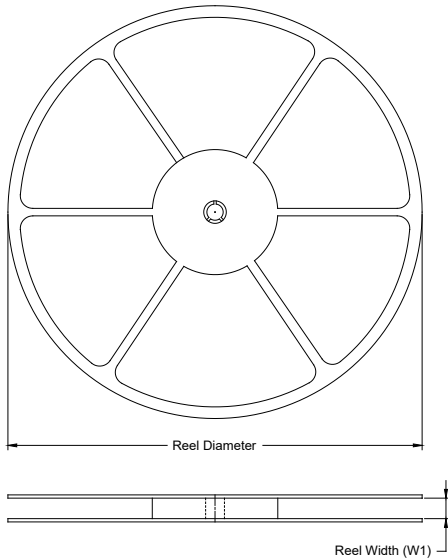

### TAPE DIMENSIONS

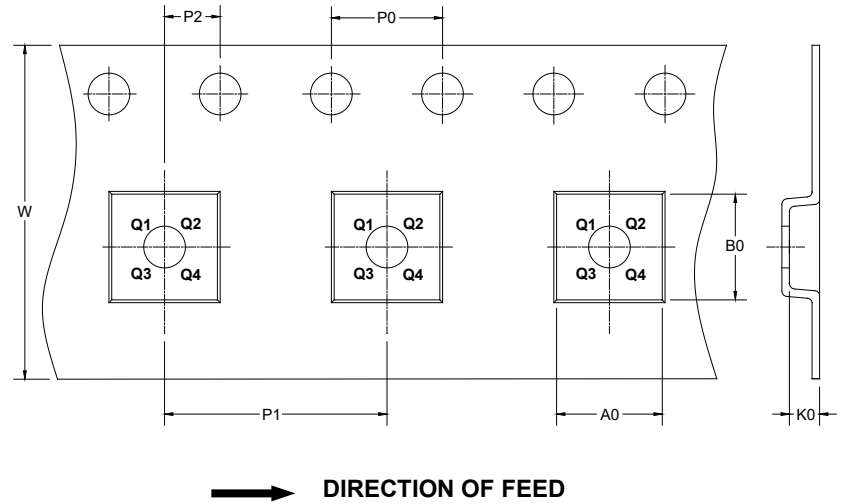

NOTE: The picture is only for reference. Please make the object as the standard.


### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TSSOP-14	13"	12.4	6.80	5.40	1.50	4.0	8.0	2.0	12.0	Q1
TQFN-3.5×3.5-14AL	13"	12.4	3.80	3.80	1.10	4.0	8.0	2.0	12.0	Q1

DD0001

## PACKAGE INFORMATION

### CARTON BOX DIMENSIONS

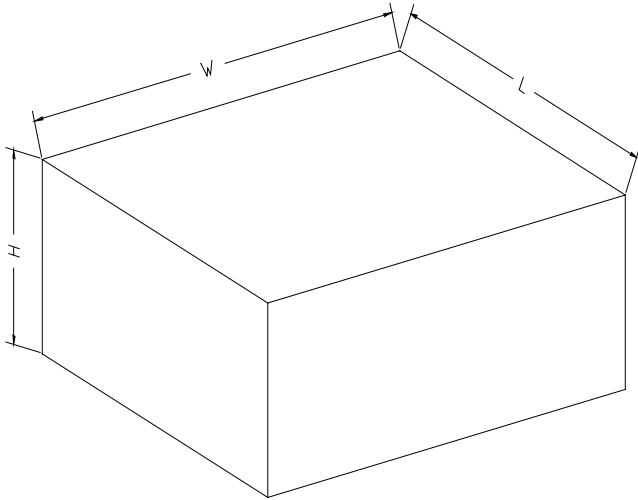

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002